




REDDOG **R2PRO**

R2PRO Professional DSLR Stabilizer





Low Camera
Position



Visible Spec
Adjustment



Collapsible
Storage



Precise
Technology



One Key
Upgrade

Low Camera Position

The unique rotation structure can place your camera in a lower position to shoot in different angles.



Function Extending Port

Status Indicating LED Light

Zoom Control

Ominidirectional Lever

Focus/Shoot

Record





Visible Screen

Spec Adjustment Thumbwheel



FOCUS

Four Modes Exchange

Overall Follow

Horizontal Follow

Lock/Roll Follow

Four Modes Free Exchange

on/off Mode
Exchange Button



BENRO® | **REDDOG R2PRO**


Silicone Handle Grip

The ergonomic silicone handle grip realizes the best hand feel at any time.



Firmware Upgraded in One Key

Connect REDDOG R2 by bluetooth to control stabilizer timely transfer. It can also upgrade by one key to keep the stabilizer updating constantly with stable performance.

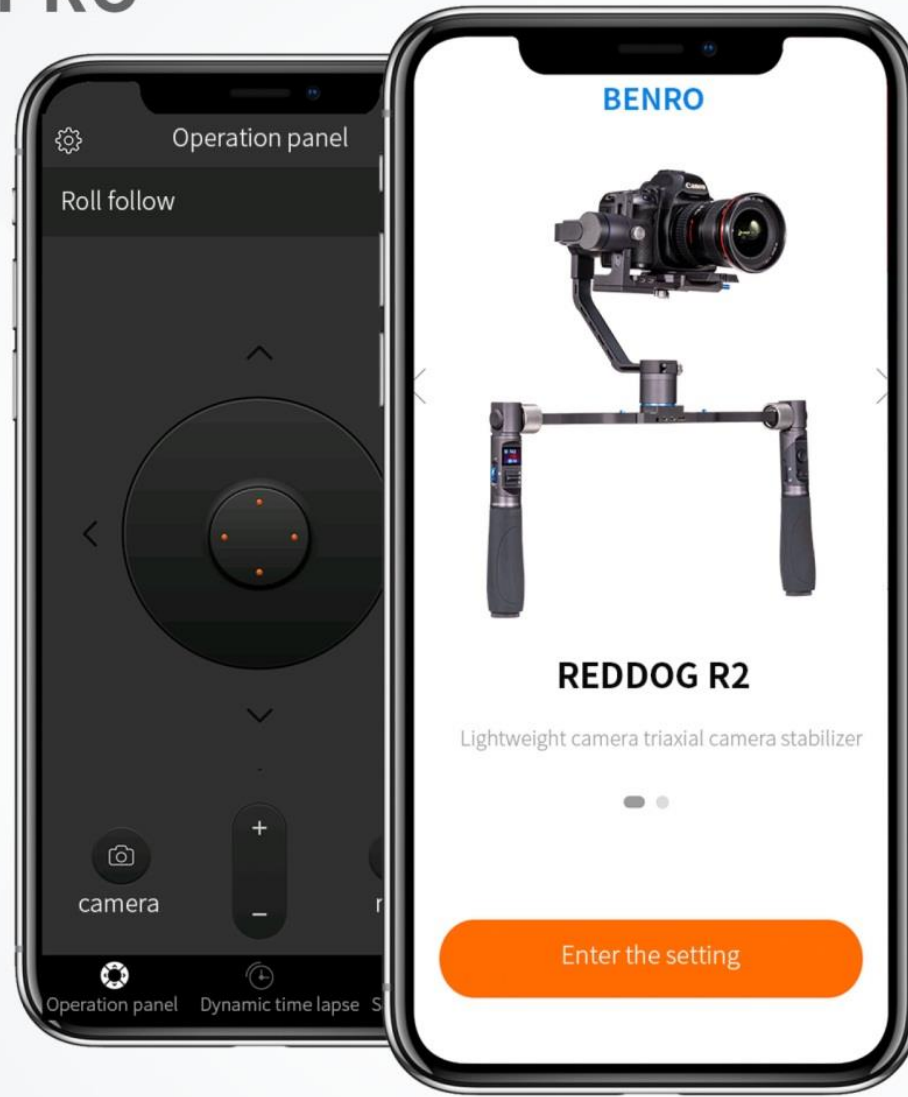

Wide Compatible Equipments

SONY A7 Series/A9 Series/Panosonic GH5/
CANON EOS Series. It can load the equipments
lower than 3.8kgs.

Canon

Support EOS series

SONY

Support TMULTI
Camera port

Panasonic

GH5





High Angle Mode

High & Low Angles
Exchange



Lower Angle Mode



REDDOG R2PRO

Moving Timelapse Shooting

After setting the shooting location, move timelapse shooting to rotate the gimble and record the beauty of the city



Multi Function Extending Mount

MIC, HDMI, USB ports are designed on the camera base plate. The multiple extending makes the exterior connection more vivid.



Convenient Storage

It is no need to disassemble the item for storage.
Just put the item into the box.

Closing Size

315x305x130mm

Extending Size

470x300x300mm



Weight

2070g (w/o battery)

Loading Capacity

3800g



3.8KG

Effective Loading Capacity

BENRO® | **REDDOG R2PRO**

Three Handle Design

Exchange two-handle holding and three-handle holding freely.




High Capacity Battery with Long Battery Life

Battery Life

12^h

Battery Capacity

3200^{mAh}

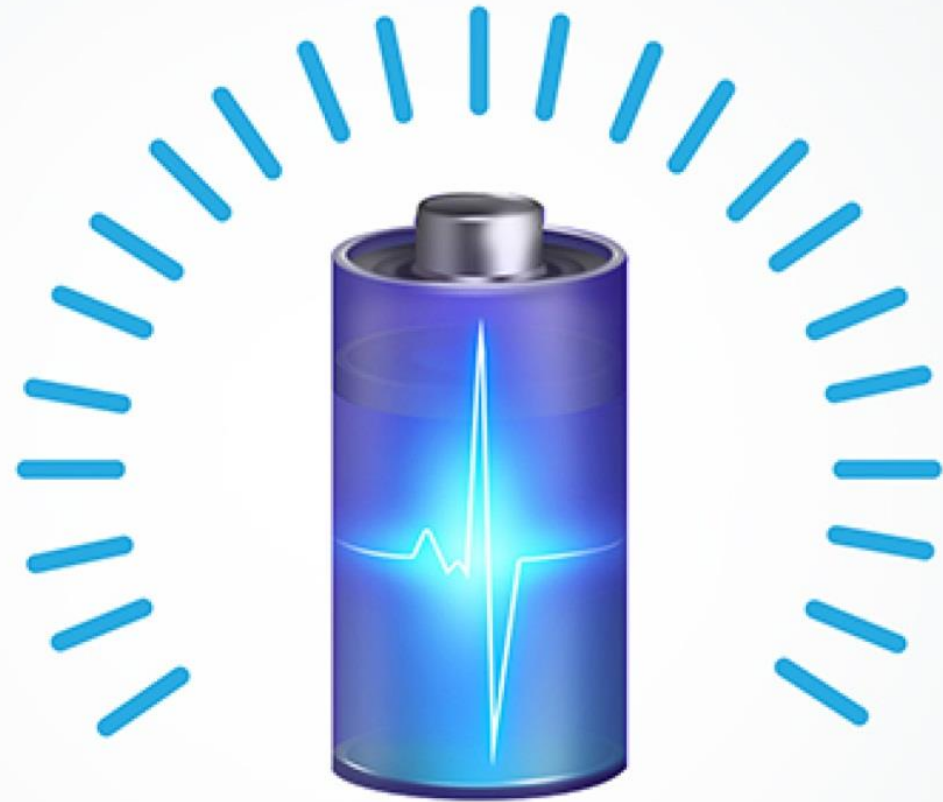



REDDOG R2PRO




Head		Specs		Remarks
Working Voltage	6.8V	8.4V		
Working Electronic Flow	350mA		Center of gravity leveling status	
Working Temperature	-10°C ~45°C			
Produce Size (W*D*H) Unit:mm	470	300	300	Extending
	315	305	130	Close
Weight of the body	2070g		excluding battery	
Tilt Range	320°			
Roll Range	320°			
Pan Range	620°			
Static attitude follow tolerance	±0.02	±0.05		
Dynamic attitude follow tolerance	±0.05	±0.2		
Maximum Loading Capacity	3800g			
Minimum Loading Capacity	700g			

Battery		Specs		Remarks
Battery type	Lithium battery			
Battery model	SP26350			
Battery capacity	3200mAh			
Charging time	3h	Charging power 5V2A		
Working time	12h	Center of gravity leveling status		

BENRO® | **REDDOG R2PRO**

Precise Technology

It is processed with precise CNC machining and the surface has been well anodized.

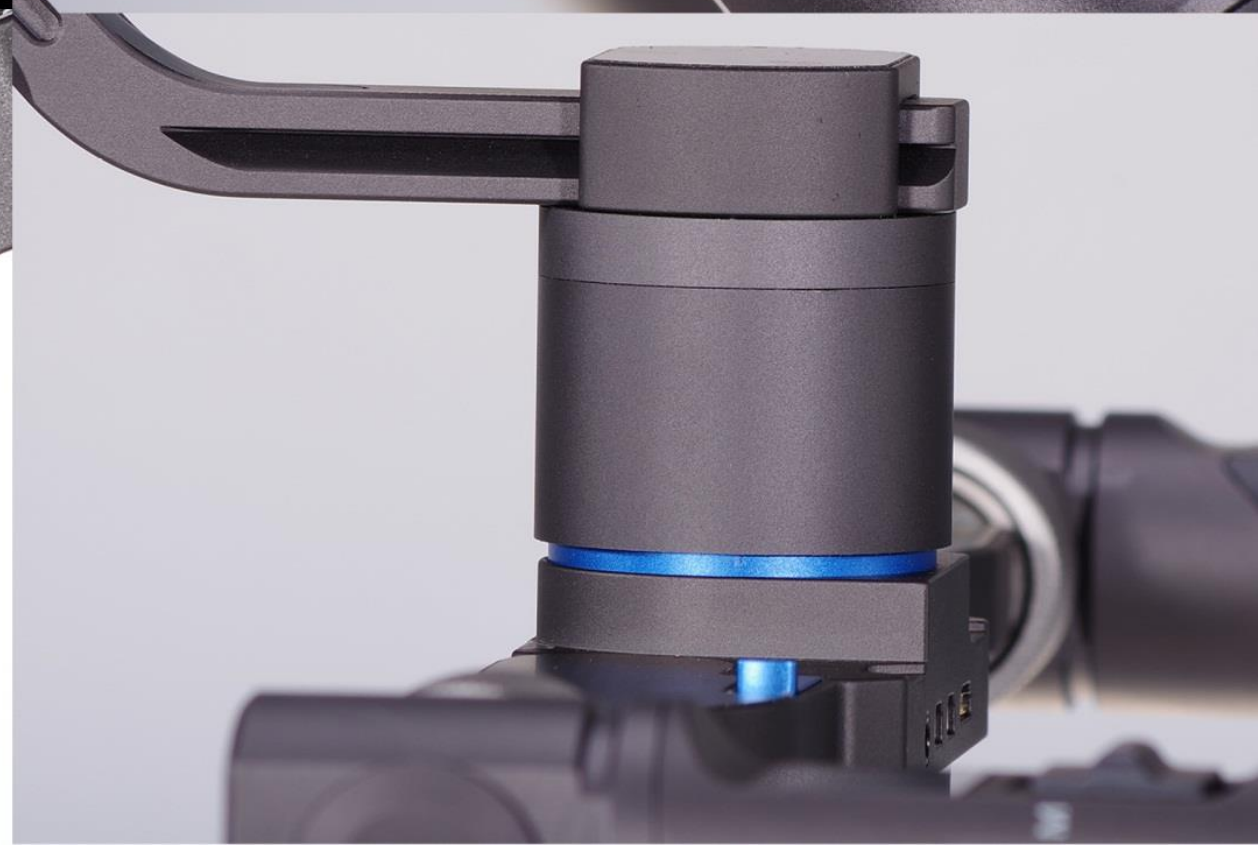

BENRO® | REDDOG R2PRO





Place the camera in a lower position

The unique rotation structure can place your camera in a lower position to shoot in different angles.




Visible specs adjustment

The camera aperture, shutter, sensitivity etc. can be easily controlled by the handle.



Dynamic time lapse

The intelligent visual graph, three axis association, and new dynamic time lapse shooting mode make the stabilizer with marvelous effect.



Focus

Focus adjustment can be realized by special camera cable, to make shooting simpler and image more stable.



Roll follow

Except the three common modes, roll follow has been added for R1 stabilizer.



APP to adjust specs

All specs can be adjusted by app with easy operation.



One button to update

The updated message will be shown at APP for REDDOG product to make your gear in tune. Just click "update" to update automatically.



Integrated Handle

All function buttons are engaged on the handle with the function of mode exchange, angle adjustment, focus, shooting, record etc.

BENRO® | **REDDOG**

Standard Product



REDDOG **R2PRO**